




Informations techniques  
Technical informations




| EYE ROUND 2                                | MONOCHROME                                                                                                                                                                |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Puissance / Power                          | 1,2W                                                                                                                                                                      |
| Montage / Configuration                    | Main courante - Plat / Handrail flat                                                                                                                                      |
| Température de Couleur / Color Temperature | <input type="checkbox"/> 1800K <input type="checkbox"/> 2200K <input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K                |
| Pilotage / Control                         | Dimming on remote power supply                                                                                                                                            |
| Angle d'éclairage / Beam Angle             | <input type="checkbox"/> 23° <input type="checkbox"/> 30° <input type="checkbox"/> 40° <input type="checkbox"/> 47° <input type="checkbox"/> Elliptique <i>Elliptical</i> |
| Alimentation / Voltage                     | <input type="checkbox"/> 24 VDC <input type="checkbox"/> 3VCC                                                                                                             |
| IRC / CRI                                  | <input type="checkbox"/> IRC 80 CRI 80                                                                                                                                    |
| Matière / Material                         | Plastique <i>Plastic</i> - PMMA                                                                                                                                           |
| Finition / Finish                          | Gris <i>Grey</i>                                                                                                                                                          |
| Protection (IP - IK - Classe)              | IP66 – IK08 – Classe 3 <i>Class 3</i>                                                                                                                                     |
| Poids / Weight                             | 20g                                                                                                                                                                       |
| Garantie / Guarantee                       | 5 ans / 2 years <i>export</i>                                                                                                                                             |

Photométries  
Beam angles

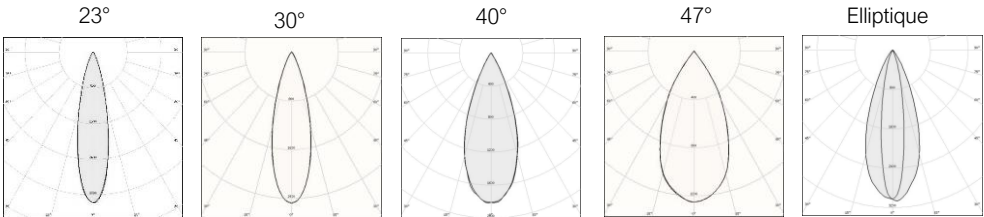

Dessin dimensionnel  
*Dimensional drawing*

ROUND 2

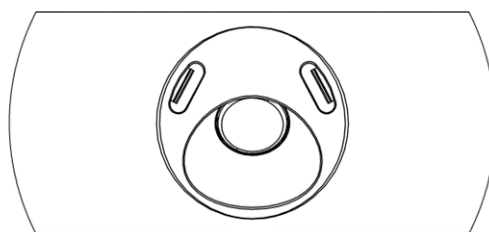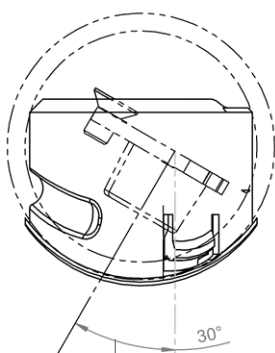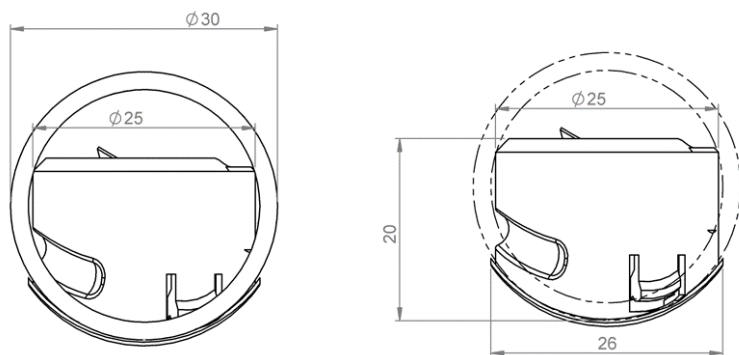

Angle d'inclinaison de l'optique  
de 30° permettant un éclairage  
précis  
*30° optical tilt angle for precise  
lighting*

