


Informations techniques

PULSA 120	MONOCHROME (BLANC ou VERT ou ROUGE ou BLEU)	TW	RGBW
Puissance / Power	30W		
Température de Couleur / Color Temperature	<input type="checkbox"/> 1800K <input type="checkbox"/> 2200K <input type="checkbox"/> 2700K <input type="checkbox"/> 3000K	TW Tunable White <input type="checkbox"/> 1800K-3000K	White <input type="checkbox"/> 1800K <input type="checkbox"/> 2200K <input type="checkbox"/> 2700K <input type="checkbox"/> 3000K
Flux Source / Flux Source	3000 lm		
Pilotage / Control	<input type="checkbox"/> On/Off <input type="checkbox"/> DALI <input type="checkbox"/> DMX <input type="checkbox"/> Casambi		
Angle d'éclairage / Beam Angle	<input type="checkbox"/> 12° <input type="checkbox"/> 24° <input type="checkbox"/> 40° <input type="checkbox"/> 60° <input type="checkbox"/> Elliptique 10°x40° > <input type="checkbox"/> Vertical <input type="checkbox"/> Horizontal		
Alimentation / Voltage	230 VAC		
IRC / CRI	IRC 90		
Matière / Material	Aluminium		
Finition / Finish	Thermolaquage RAL au choix		
Protection (IP - IK - Classe)	IP66 – IK10 – Classe 2		
Poids / Weight	3,2kg		
Durée de vie	L90 B10 > 90 000 heures		
Garantie	5 ans		

Photométries (beam angles)

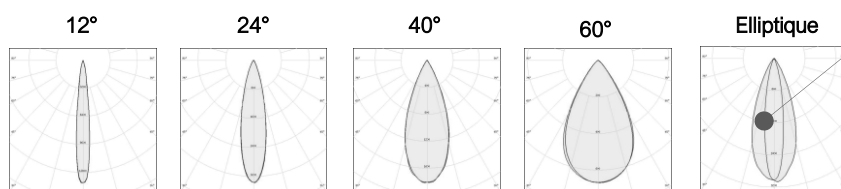

Sens de l'ellipse au choix :
Horizontal / Vertical