
Gamme IRIS

Module LED – Main courante
LED modul – handrail





Minimaliste, élégante, révélatrice

ODELI présente la gamme IRIS

Spécialement conçue pour une intégration multisupport, la gamme IRIS allie élégance et performance pour mettre en lumière des cheminements et escaliers de façon à la fois esthétique et efficace.

L'objectif : guider discrètement, tout en finesse, tout en sécurisant le parcours. Disponible en trois tailles et différentes configurations (intégration au mur, dans une rambarde, version avec ou sans collerette), adaptée à une intégration indoor ou outdoor, IRIS s'adapte à tous les projets.

Recommandation d'utilisation :



Eclairage architectural, escalier, rambarde, cheminement piéton

Outdoor / Indoor
Mur / Rambarde / Main courante
Trois tailles, quatre
configurations de montage
RAL au choix

Specifically designed for multi-surface integration, the IRIS range combines elegance and performance to illuminate pathways and staircases in a way that is both aesthetically pleasing and effective.

IRIS provides discreet and subtle guidance while ensuring safety. Available in three sizes and various configurations (wall integration, railing integration, trim or trimless), suitable for indoor or outdoor use, IRIS adapts to all projects.

Recommended applications:
Architectural lighting, staircases, railings, pedestrian walkways

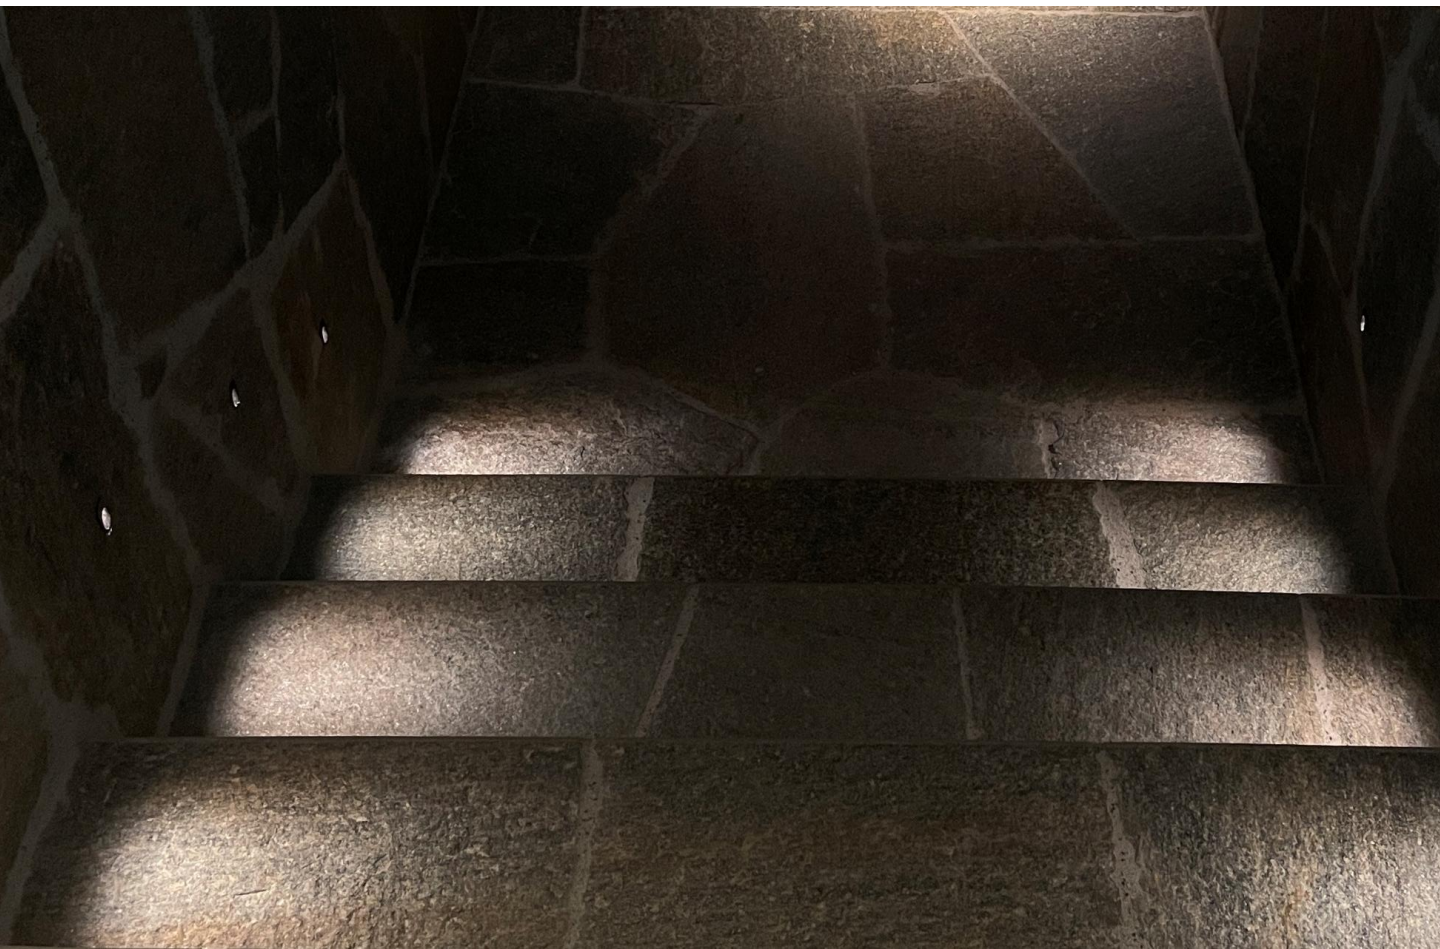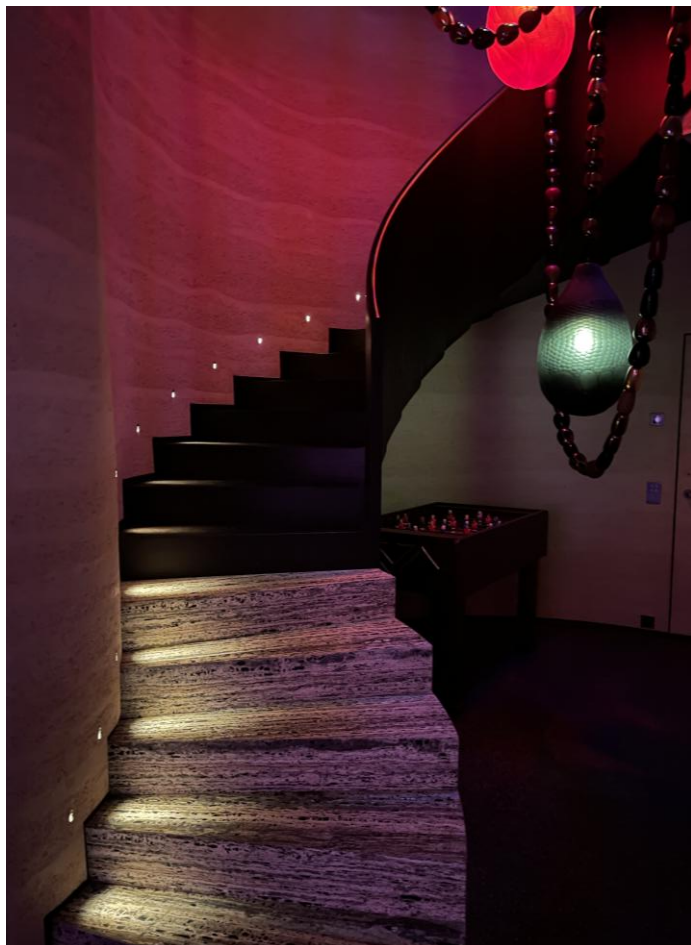

IRIS S (20 x 37mm) 1,2 W

IRIS M (33 x 53mm) 2W

IRIS L (40 x 70mm) 3W

Trois tailles
Three sizes



IRIS S

IRIS M

IRIS L

Quatre configurations
Four configurations



Trim

avec collerette, idéal pour
encastrement mural
with collar, ideal for wall
mounting



Trimless

sans collerette, idéal pour
 finition enduite placo
without collar, ideal for
placo finish



Flat Post

Rambarde plate
Flat handrail
integration



Round Post

Rambarde ronde
Round handrail
integration

Trim

Trimless

Flat Post

Round Post

Finitions
Finish



Thermolaquage (RAL au choix)

Powder coating, custom RAL

Données techniques
Technical information



IRIS		BLANC MONOCHROME				
Puissance / Power	☐ 1.2W (S) ☐ 2W (M) ☐ 3W (L)					
Configuration / Configuration	☐ Trim ☐ Trimless ☐ Flat Post ☐ Round Post					
Température de Couleur / Color temperature	☐ 1800K	☐ 2200K	☐ 2400K	☐ 2700K	☐ 3000K	
Pilotage / Control	Driver déporté (Driver On-Off / Dali / Casambi) / Dimming on remote power supply					
Angle d'éclairage / Beam angle	Angle d'inclinaison optique 30° / Optical tilt angle 30° ☐ 16° ☐ 24° ☐ 36° ☐ 55° Elliptique 15°x50° : ☐ Vertical ☐ Horizontal Elliptical 15°x50° : ☐ Vertical ☐ Horizontal					
Alimentation / Alimentation	☐ 3VCC ☐ 24 VDC					
IRC / CRI	IRC 90 / CRI 90					
Matière / Material	Aluminium					
Finition / Finish	Thermolaquage : RAL au choix / Powder coating : custom RAL					
Protection (IP – IK – Classe) / Protection (IP – IK – Class)	IP66 – IK10 – Classe 3					
Poids / Weight	0,1kg (S) - 0,2kg (M) – 0,3 kg (L)					
Garantie / Guarantee	5 ans / 2 years (export)					

Angle d'éclairage
Beam angle

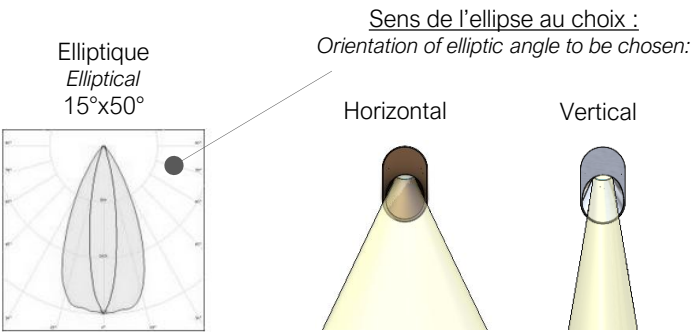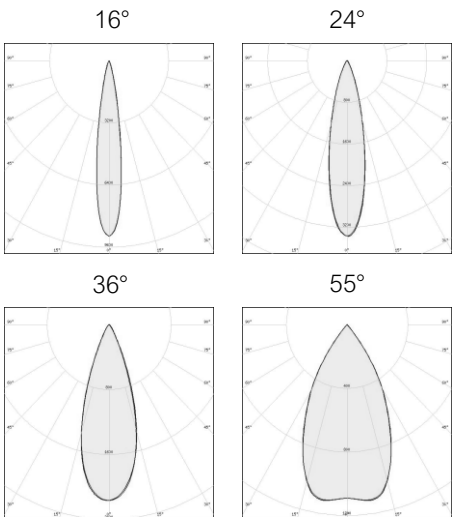




Montage version encastrée murale
Wall mounted version

IRIS S Trim

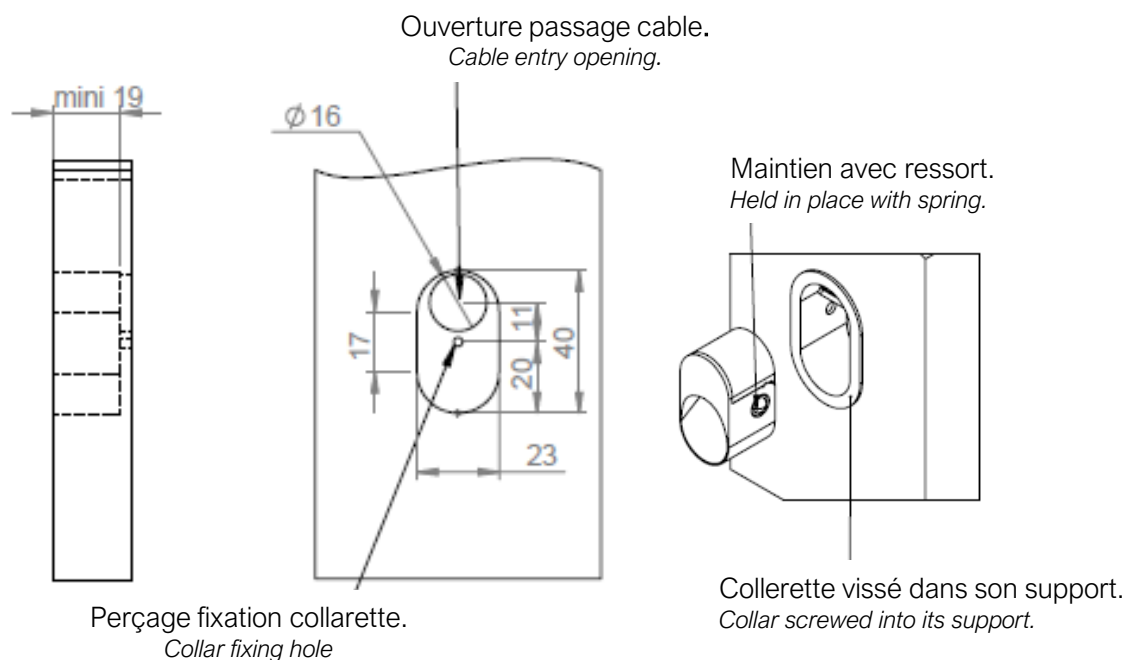
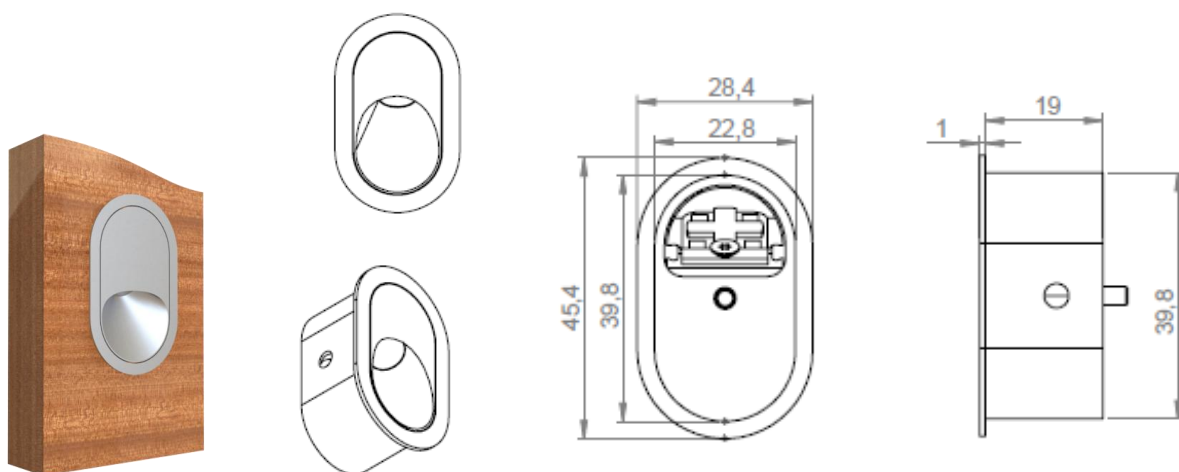


Montage version encastrée murale
Wall mounted version


IRIS S Trimless

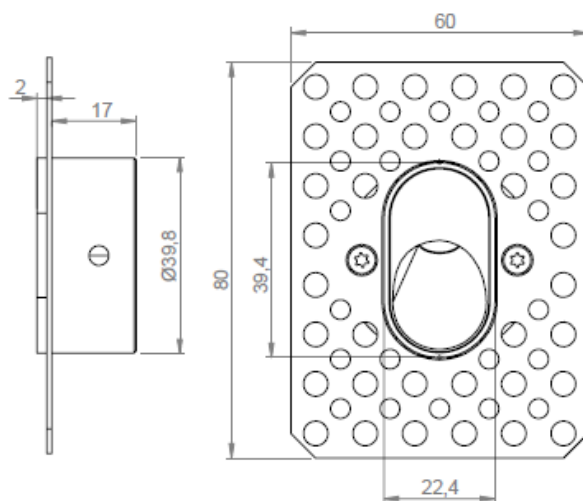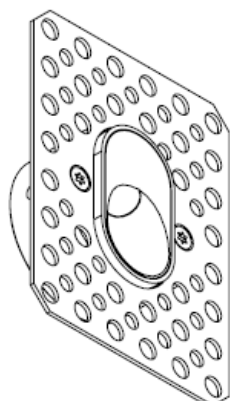

Maintien avec ressort.
Held in place with spring.





Colerette vissé dans son support, puis à enduire.
Collar screwed into its support, then coated.

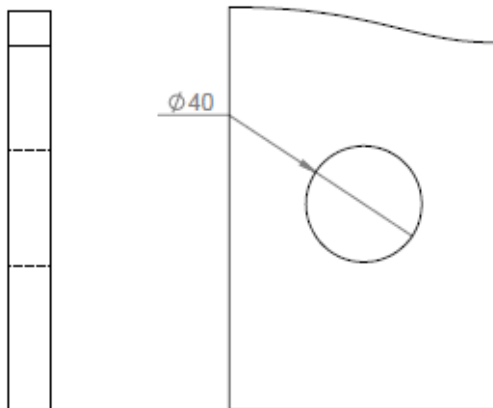



Montage version intégration rambarde
Integration flat handrail

IRIS S Flat Post

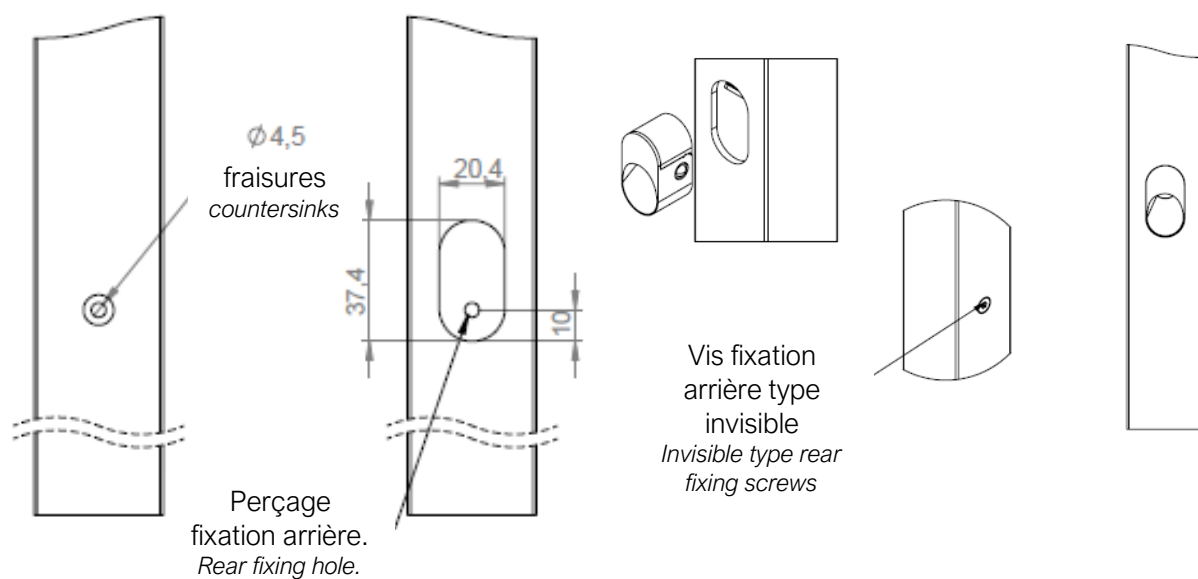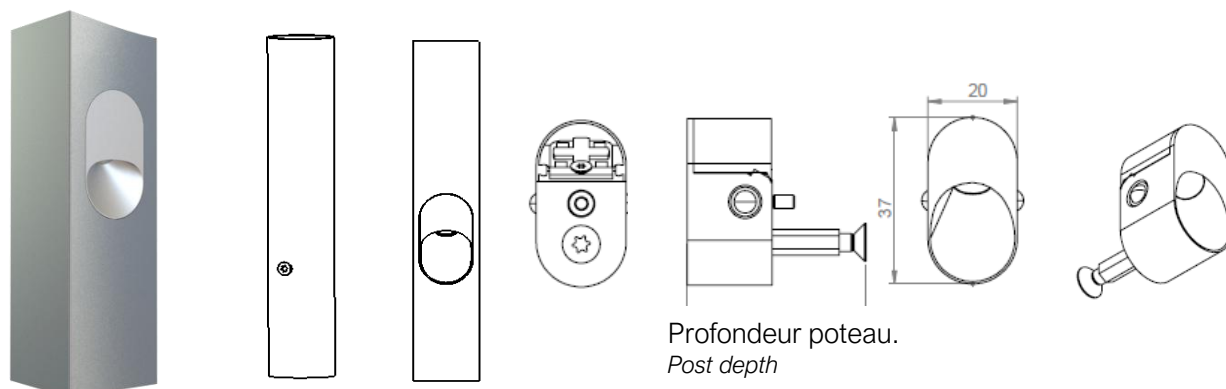

Montage version intégration rambarde
Integration round handrail

IRIS S Round Post

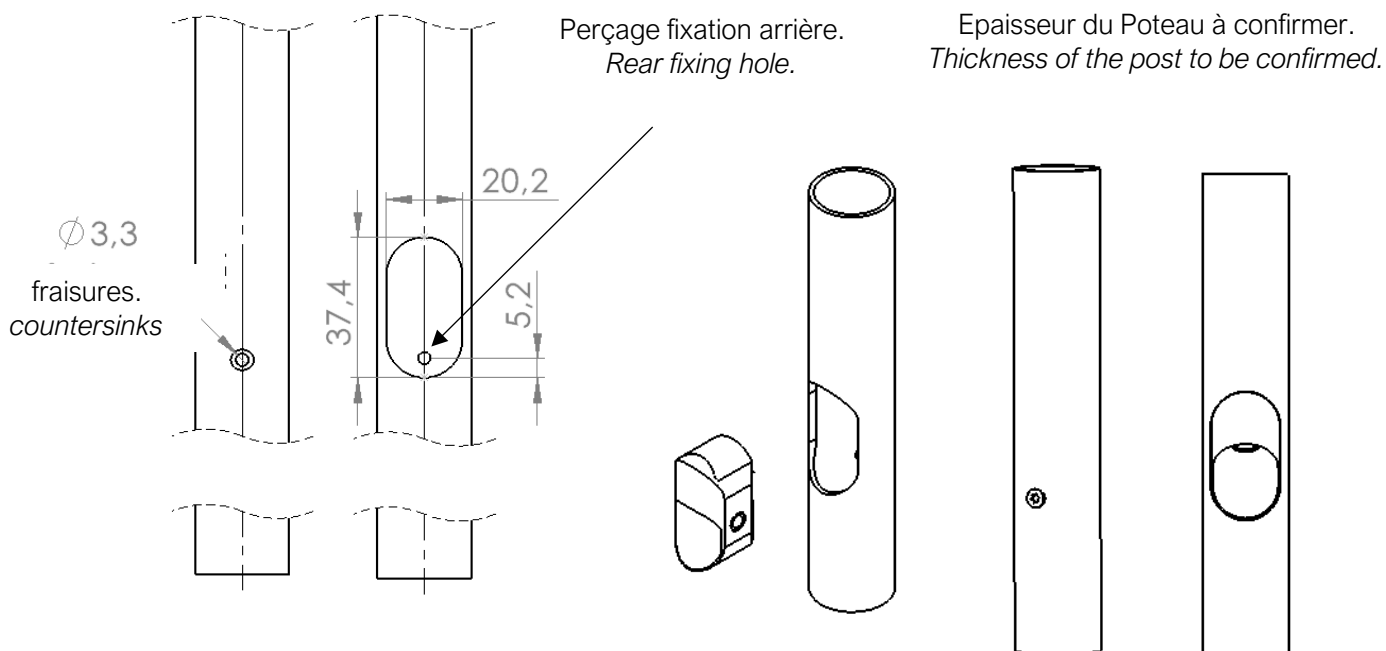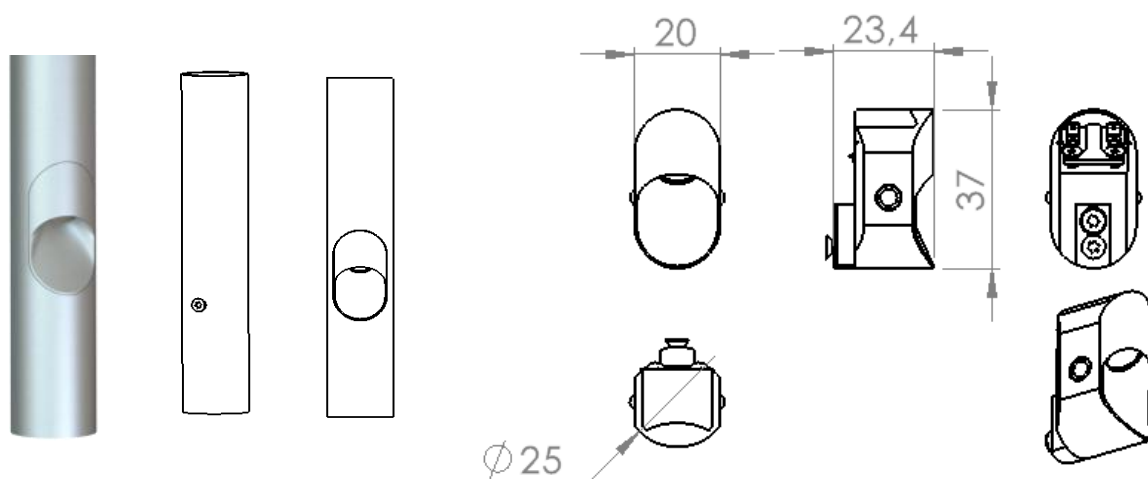

ODELI

294 Rue Albert de Dion
63500 Issoire
Puy-de-Dôme, France

+33 (0)9 73 89 45 68
contact@odeli.fr
www.odeli.fr

